


# Product data sheet

Status: 15.07.2023 | 22:05

Item no. 6100

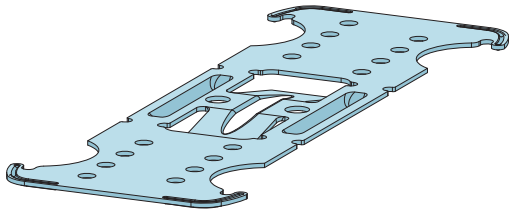

<b>Designation</b>	Flat quick cross-connector for U50 to C 60-27
<b>Description</b>	For creating cross connections from UA-50 to CD 60-27 profiles on hanging ceiling sub- constructions.
<b>Product area</b>	Dry lining / lightweight steel construction
<b>Product category</b>	Standard accessoires
<b>Material</b>	Galvanised steel
<b>Material thickness</b>	0,9 mm
<b>Galvanizing</b>	tested to standard
<b>Standard EN</b>	EN 13964:2014
<b>Standard</b>	DIN18168-2
<b>Reaction to fire (R2F)</b>	A1
<b>Capacity class</b>	0,40 kN
<b>Treatment</b>	<ul style="list-style-type: none"><li>- Bend the side legs to the middle part by 90 degrees.</li><li>- Slide over the UA-50 profile at a slight angle and hook the lateral legs into the support profile.</li><li>- To click in the legs on the other side, press on the middle section from above until you hear them snap in.</li><li>- After the installation, the profiles can still be moved.</li></ul>
<b>Packaging Unit</b>	100 ST / 250 KAR
<b>Load bearing capacity</b>	760 N

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

**PROTEKTORWERK**  
Florenz Maisch GmbH & Co. KG  
Postfach 1420, D-76554 Gaggenau  
Viktoriastr. 58, D-76571 Gaggenau

Tel. +49 7225 977 - 0  
Fax +49 7225 9 77 - 111  
info@protektor.com  
www.protektor.com

